

Wellpoint Pumps

Griffin's Wellpoint Systems have been known by Contractors worldwide for over 75 years for reliable construction dewatering.

Features:

- Fully automatic, dry priming
- Rotary vane vacuum pumps standard
- Automatically primes and reprimates at suction lifts of 25ft. or greater
- Over-sized air separation chamber with stainless steel float strips high volumes of light gases and air for fast priming
- End suction centrifugal
- Self contained portable pump
- Integral fuel tank designed for 24 hour operation
- Trailer mounted versions available



Wellpoint dewatering system at a sewer repair project in Valley, Nebraska.



Wellpoint dewatering system in use at a pond excavation in Alvin, Texas.



A Griffin 6 inch diesel driven Wellpoint Pump

Griffin's Vacuum-Assisted Wellpoint Pumps are available in 4", 6", 8" and 10" models. These pumps are designed for handling high volumes of water and air. The pump automatically primes and reprimates at suction lifts of 25 ft. or greater.

These pumps are capable of handling flow up to 3500 gpm, head conditions up to 150 ft and over 200 cfm of air. The pumps are available with the Wind Tunnel ® high volume air handling system. Griffin Wellpoint Pumps are particularly suited for wellpoint dewatering systems in pervious soil formation. Combined with Griffin's line of wellpoint accessories it is easy to install and operate an efficient and complete wellpoint system.

These pumps are available in diesel and electric options, with an integral fuel tank or trailer mounted. Other options are available with these units including hydraulic drives. Contact Griffin for more information and options available.



Since 1934

GRIFFIN

Pump and Equipment, Inc.



Pumps you can trust for over 75 years.

5306 Clinton Drive, Houston, TX 77020

(713)671-7000 • Fax: (713)675-4820

web: www.griffinpump.com • e-mail: gpe@griffinpump.com

Complete Wellpoint Systems

The wellpoint system is the oldest method of dewatering and has been in use by Griffin for more than 75 years.

Wellpoint System Accessories Available Wellpoints

Aquaspade All PVC with Drawdown Tube



Aquaspade Self-Jetting, PVC Screen



Aquaspade Self-Jetting, Stainless Steel Screen

Griffin Wellpoints are available in 1 1/2" or 2" with stainless steel screen or PVC screen. They are available in non jetting and self jetting tips.

Butterfly Swingjoints




Butterfly Swingjoints are constructed of flexible yet reinforced hose with a clear elbow to visually see the flow through the system. The butterfly valve allows the system to be tuned, by hand, to monitor and maintain the vacuum level on the system to maximize performance.

Header Pipe/Saddles/Plugs



Griffin offers complete header pipe systems in PVC or HDPE. Saddles are already installed in the header pipe. Header couplings and screw bands to join other headers are included as well as plugs to cap the saddles.

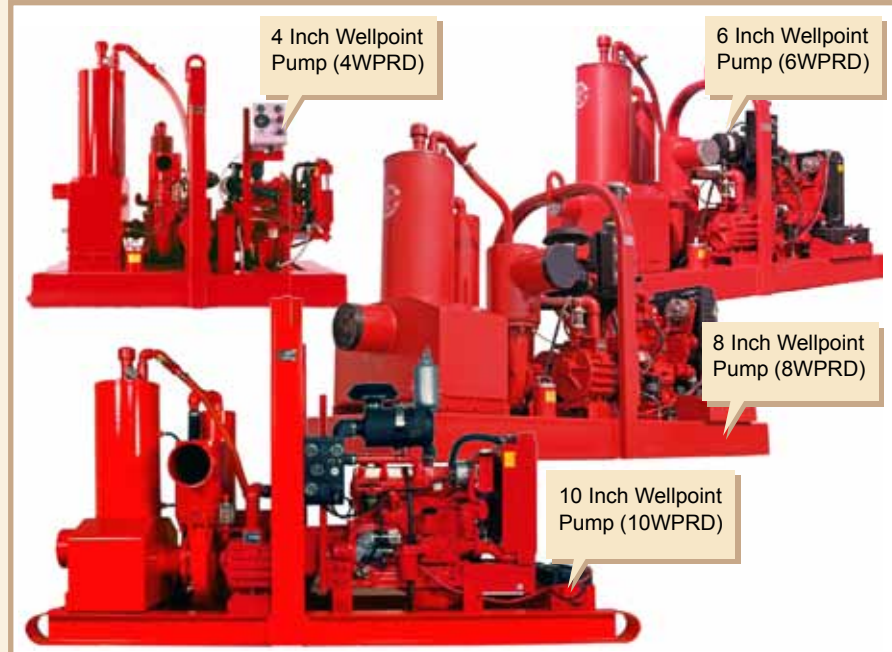

4 Inch Wellpoint Pump (4WPRD)

6 Inch Wellpoint Pump (6WPRD)

8 Inch Wellpoint Pump (8WPRD)

10 Inch Wellpoint Pump (10WPRD)

Wellpoint pump models are available in 4", 6", 8", 10" sizes, Silent Pack configuration, trailer mounted, and either electric or diesel driven units.



Griffin Pump & Equipment Inc. can supply the total system for you to install and operate your wellpoint system.



Since 1934

GRIFFIN

Pump and Equipment, Inc.



Pumps you can trust for over 75 years.

5306 Clinton Drive, Houston, TX 77020

(713)671-7000 • Fax: (713)675-4820

web: www.griffinpump.com • e-mail: gpe@griffinpump.com