


JET PUMPS HIGH-PRESSURE

DESIGNED FOR APPLICATIONS REQUIRING HIGH-PRESSURE FLOW - JETTING WELLPOINTS, WELL CASINGS, OR EDUCTORS.

- › Equipped with hand-operated primers; automatic primers available
- › Capable of up to 910 ft. of head & up to 1,400 GPM
- › Mechanical or packing seal configurations available
- › Integral fuel tank designed for up to 24-hour operation on some models



- › PORTABLE & SELF-CONTAINED
- › END SUCTION CENTRIFUGAL PUMP
- › TRAILER MOUNTED VERSION *
- › DIESEL OR ELECTRIC OPTIONS

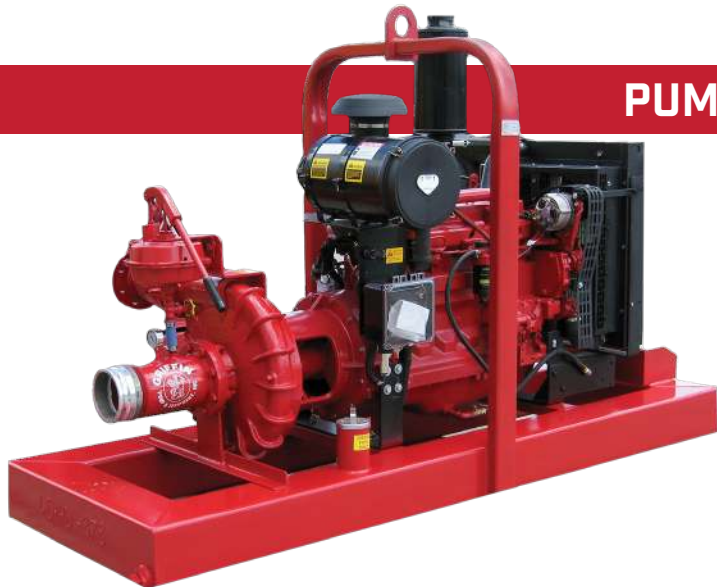

PUMP MODELS

	MAX CAPACITY (GPM)	MAX HEAD (FT.)	MAX HEAD (PSI)
4" 4EHDD	680	360'	156
6" 6EHDD	1,400	440'	190
6" 325SCRD	1,400	910'	394

* Trailer mounted version available on some models.
 Pump models and specifications are subject to change without notice. Contact Griffin for specific pump models.

**CONTACT THE DEWATERING
EXPERTS FOR PUMP INFORMATION**



**GRIFINDEWATERING.COM
1-800-431-1510**